


### TERMINALS

#### Cable end-sleeves insulated

Material : Copper  
 Temperature range : Up to +105 °C  
 Minimum coating thickness : 3 µm  
 Certification : DIN 46228/4  
 Entry tunnel is made of Polypropylene

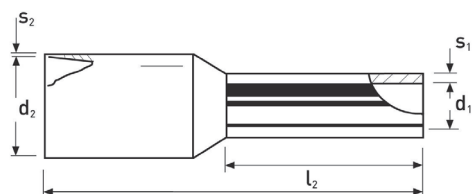

“T” type = Telemechanic  
 “W” type = Weidmüller  
 “D” type = DIN

Typenr.	Mm <sup>2</sup>	AWG	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	S1 (mm)	Color T	Color W	Color D	Packing (pcs)
Ce 001406	0,14	26	10,00	6,00	0,70	1,60	0,15	Brown	Grey	-	500
Ce 001408	0,14	26	12,00	8,00	0,70	1,60	0,15	Brown	Grey	-	500
Ce 002506	0,25	24	10,00	6,00	0,75	1,80	0,15	Yellow	Blue	Purple	500
Ce 002508	0,25	24	12,00	8,00	0,75	1,80	0,15	Yellow	Blue	Purple	500
Ce 003406	0,34	22	10,00	6,00	0,80	2,00	0,15	Green	Tur-quoise	Pink	500
Ce 003408	0,34	22	12,00	8,00	0,80	2,00	0,15	Green	Tur-quoise	Pink	500
Ce 005006	0,50	20	12,00	6,00	1,00	2,60	0,15	White	Orange	White	500
Ce 005008	0,50	20	14,00	8,00	1,00	2,60	0,15	White	Orange	White	500
Ce 005010	0,50	20	16,00	10,00	1,00	2,60	0,15	White	Orange	White	500
Ce 007506	0,75	18	12,00	6,00	1,20	2,80	0,15	Blue	White	Grey	500
Ce 007508	0,75	18	14,00	8,00	1,20	2,80	0,15	Blue	White	Grey	500
Ce 007510	0,75	18	16,00	10,00	1,20	2,80	0,15	Blue	White	Grey	500
Ce 007512	0,75	18	18,00	12,00	1,20	2,80	0,15	Blue	White	Grey	500
Ce 010006	1,00	18	12,00	6,00	1,40	3,00	0,15	Red	Yellow	Red	500
Ce 010008	1,00	18	14,00	8,00	1,40	3,00	0,15	Red	Yellow	Red	500
Ce 010010	1,00	18	16,00	10,00	1,40	3,00	0,15	Red	Yellow	Red	500
Ce 010012	1,00	18	18,00	12,00	1,40	3,00	0,15	Red	Yellow	Red	500
Ce 015006	1,50	16	12,00	6,00	1,70	3,50	0,15	Black	Red	Black	500
Ce 015008	1,50	16	14,00	8,00	1,70	3,50	0,15	Black	Red	Black	500
Ce 015010	1,50	16	16,00	10,00	1,70	3,50	0,15	Black	Red	Black	500
Ce 015012	1,50	16	18,00	12,00	1,70	3,50	0,15	Black	Red	Black	500
Ce 015018	1,50	16	24,00	18,00	1,70	3,50	0,15	Black	Red	Black	500
Ce 025008	2,50	14	14,00	8,00	2,20	4,20	0,15	Grey	Blue	Blue	500
Ce 025010	2,50	14	16,00	10,00	2,20	4,20	0,15	Grey	Blue	Blue	500
Ce 025012	2,50	14	18,00	12,00	2,20	4,20	0,15	Grey	Blue	Blue	500
Ce 025018	2,50	14	24,00	18,00	2,20	4,20	0,15	Grey	Blue	Blue	500

For other types, please see the following page

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.

# TERMINALS

## CABLE END-SLEEVES

Typenr.	Mm <sup>2</sup>	AWG	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	S1 (mm)	Color T	Color W	Color D	Packing (pcs)
Ce 040010	4,00	12	17,00	10,00	2,80	4,80	0,20	Orange	Grey	Grey	500
Ce 040012	4,00	12	20,00	12,00	2,80	4,80	0,20	Orange	Grey	Grey	500
Ce 040018	4,00	12	26,00	18,00	2,80	4,80	0,20	Orange	Grey	Grey	500
Ce 060012	6,00	10	20,00	12,00	3,50	6,30	0,20	Green	Black	Yellow	100
Ce 060018	6,00	10	26,00	18,00	3,50	6,30	0,20	Green	Black	Yellow	100
Ce 100012	10,00	8	22,00	12,00	4,50	7,60	0,20	Brown	Cream	Red	100
Ce 100018	10,00	8	28,00	18,00	4,50	7,60	0,20	Brown	Cream	Red	100
Ce 160012	16,00	6	24,00	12,00	5,80	8,80	0,20	Cream	Green	Blue	100
Ce 160018	16,00	6	28,00	18,00	5,80	8,80	0,20	Cream	Green	Blue	100
Ce 250016	25,00	4	30,00	16,00	7,30	11,20	0,20	Black	Brown	Yellow	50
Ce 250018	25,00	4	30,00	18,00	7,30	11,20	0,20	Black	Brown	Yellow	50
Ce 250022	25,00	4	36,00	22,00	7,30	11,20	0,20	Black	Brown	Yellow	50
Ce 350016	35,00	2	30,00	16,00	8,30	12,70	0,20	Red	Cream	Red	50
Ce 350018	35,00	2	30,00	18,00	8,30	12,70	0,20	Red	Cream	Red	50
Ce 350025	35,00	2	39,00	25,00	8,30	12,70	0,20	Red	Cream	Red	50
Ce 500020	50,00	1	36,00	20,00	10,30	15,00	0,30	Blue	Olive	Blue	50
Ce 500025	50,00	1	40,00	25,00	10,30	15,00	0,30	Blue	Olive	Blue	50
Ce 700021	70,00	2/0	37,00	21,00	13,50	16,00	0,40	Yellow	Yellow	Yellow	25
Ce 950025	95,00	3/0	44,00	25,00	14,50	18,00	0,40	Red	Red	Red	25
Ce 1200027	120,00	4/0	48,00	27,00	16,50	20,00	0,45	Blue	Blue	Blue	25
Ce 1500032	150,00	300 MCM	58,00	32,00	19,50	23,00	0,50	Yellow	Yellow	Yellow	25

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.