


TERMINALS

Non insulated DIN 46234 terminals

Material : Copper
 Certification : DIN 46234

On request: 95 mm², 120 mm², 150 mm², 185 mm² and 240 mm²

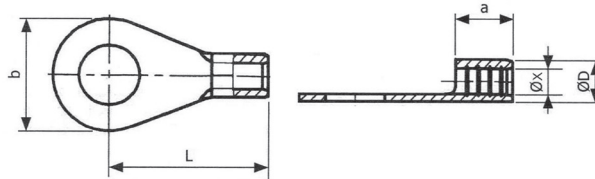

¹ = Does not meet the DIN standards

Typenr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	b (mm)	L (mm)	a (mm)	Packing (pcs)
PKQ 15.03	0,5 ~ 1,5	22 ~ 16	3,0	1,6	3,2	6,0	11,0	5,0	100
PKQ 15.04	0,5 ~ 1,5	22 ~ 16	4,0	1,6	3,2	8,0	12,0	5,0	100
PKQ 15.05	0,5 ~ 1,5	22 ~ 16	5,0	1,6	3,2	10,0	13,0	5,0	100
PKQ 15.06 ¹	0,5 ~ 1,5	22 ~ 16	6,0	1,6	3,2	10,0	13,0	5,0	100
PKQ 15.08 ¹	0,5 ~ 1,5	22 ~ 16	8,0	1,6	3,2	14,0	17,0	5,0	100
PKQ 15.10 ¹	0,5 ~ 1,5	22 ~ 16	10,0	1,6	3,2	14,0	17,0	5,0	100
PKQ 25.03	1,5 ~ 2,5	16 ~ 14	3,0	2,3	3,9	6,0	11,0	5,0	100
PKQ 25.04	1,5 ~ 2,5	16 ~ 14	4,0	2,3	3,9	8,0	12,0	5,0	100
PKQ 25.05	1,5 ~ 2,5	16 ~ 14	5,0	2,3	3,9	10,0	14,0	5,0	100
PKQ 25.06	1,5 ~ 2,5	16 ~ 14	6,0	2,3	3,9	11,0	16,0	5,0	100
PKQ 25.08	1,5 ~ 2,5	16 ~ 14	8,0	2,3	3,9	14,0	17,0	5,0	100
PKQ 25.10 ¹	1,5 ~ 2,5	16 ~ 14	10,0	2,3	3,9	18,0	18,0	5,0	100
PKQ 25.12 ¹	1,5 ~ 2,5	16 ~ 14	12,0	2,3	3,9	18,0	18,0	5,0	100
PKQ 60.04	4,0 ~ 6,0	12 ~ 10	4,0	3,6	5,6	8,0	14,0	6,0	100
PKQ 60.05	4,0 ~ 6,0	12 ~ 10	5,0	3,6	5,6	10,0	15,0	6,0	100
PKQ 60.06	4,0 ~ 6,0	12 ~ 10	6,0	3,6	5,6	11,0	16,0	6,0	100
PKQ 60.08	4,0 ~ 6,0	12 ~ 10	8,0	3,6	5,6	14,0	19,0	6,0	100
PKQ 60.10	4,0 ~ 6,0	12 ~ 10	10,0	3,6	5,6	18,0	21,0	6,0	100
PKQ 60.12 ¹	4,0 ~ 6,0	12 ~ 10	12,0	3,6	5,6	18,0	21,0	6,0	100
PKQ 100.05	10,0	8	5,0	4,5	6,7	10,0	16,0	8,0	100
PKQ 100.06	10,0	8	6,0	4,5	6,7	11,0	17,0	8,0	100
PKQ 100.08	10,0	8	8,0	4,5	6,7	14,0	20,0	8,0	100
PKQ 100.10	10,0	8	10,0	4,5	6,7	18,0	21,0	8,0	100
PKQ 100.12	10,0	8	12,0	4,5	6,7	22,0	23,0	8,0	100

For other types, please see the following page

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.

Typenr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	b (mm)	L (mm)	a (mm)	Packing (pcs)
PKQ 160.05	16,0	6	5,0	5,8	8,2	11,0	20,0	10,0	100
PKQ 160.06	16,0	6	6,0	5,8	8,2	11,0	20,0	10,0	100
PKQ 160.08	16,0	6	8,0	5,8	8,2	18,0	24,0	10,0	100
PKQ 160.10	16,0	6	10,0	5,8	8,2	18,0	24,0	10,0	100
PKQ 160.12	16,0	6	12,0	5,8	8,2	22,0	26,0	10,0	100
PKQ 250.05	25,0	4	5,0	7,5	10,5	12,0	25,0	11,0	100
PKQ 250.06	25,0	4	6,0	7,5	10,5	12,0	25,0	11,0	100
PKQ 250.08	25,0	4	8,0	7,5	10,5	16,0	25,0	11,0	100
PKQ 250.10	25,0	4	10,0	7,5	10,5	18,0	26,0	11,0	100
PKQ 250.12	25,0	4	12,0	7,5	10,5	22,0	31,0	11,0	100
PKQ 250.16	25,0	4	16,0	7,5	10,5	28,0	35,0	11,0	100
PKQ 350.06	35,0	2	6,0	9,0	12,2	15,0	26,0	12,0	100
PKQ 350.08	35,0	2	8,0	9,0	12,2	16,0	26,0	12,0	100
PKQ 350.10	35,0	2	10,0	9,0	12,2	18,0	27,0	12,0	100
PKQ 350.12	35,0	2	12,0	9,0	12,2	22,0	31,0	12,0	100
PKQ 350.16	35,0	2	16,0	9,0	12,2	28,0	36,0	12,0	100
PKQ 500.06	50,0	1/0	6,0	11,0	14,6	18,0	34,0	16,0	100
PKQ 500.08	50,0	1/0	8,0	11,0	14,6	18,0	34,0	16,0	100
PKQ 500.10	50,0	1/0	10,0	11,0	14,6	18,0	34,0	16,0	100
PKQ 500.12	50,0	1/0	12,0	11,0	14,6	22,0	36,0	16,0	100
PKQ 500.16	50,0	1/0	16,0	11,0	14,6	28,0	40,0	16,0	100
PKQ 700.06	70,0	2/0	6,0	13,0	17,0	22,0	36,0	18,0	100
PKQ 700.08	70,0	2/0	8,0	13,0	17,0	22,0	38,0	18,0	100
PKQ 700.10	70,0	2/0	10,0	13,0	17,0	22,0	38,0	18,0	100
PKQ 700.12	70,0	2/0	12,0	13,0	17,0	22,0	38,0	18,0	100
PKQ 700.16	70,0	2/0	16,0	13,0	17,0	28,0	42,0	18,0	100

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.