


TERMINALS

PVC insulated piggy-back connectors

Maximum electrical rating : 300 V max.
Maximum temperature : 75 °C
Insulation material : PVC
Terminal material : Brass

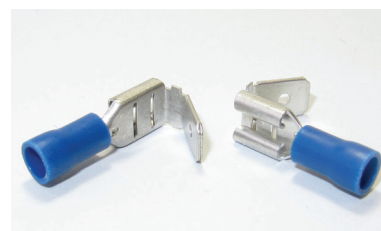

Also available without sleeve and with "easy entry"

Typenr.	Color	Wire range (mm ²)	Tab (mm)	AWG	Packing (pcs)
RBFVDDFM 1.25-250A	Red	0,5 ~ 1,5	0,8 * 6,4	22 ~ 16	100
RBFVDDFM 2-250B	Blue	1,5 ~ 2,5	0,8 * 6,4	16 ~ 14	100
RBFVDDFM 5.5-250A	Yellow	4,0 ~ 6,0	0,8 * 6,4	12 ~ 10	100

TERMINALS

PVC insulated male disconnectors

Maximum electrical rating : 300 V max.
Maximum temperature : 75 °C
Insulation material : PVC
Terminal material : Brass



Also available without sleeve and with "easy entry"

Typenr.	Color	Wire range (mm ²)	Tab (mm)	AWG	Packing (pcs)
RBFVDM 1.25-110A5	Red	0,5 ~ 1,5	0,5 * 2,8	22 ~ 16	100
RBFVDM 1.25-110A8	Red	0,5 ~ 1,5	0,8 * 2,8	22 ~ 16	100
RBFVDM 1.25-187A5	Red	0,5 ~ 1,5	0,5 * 4,8	22 ~ 16	100
RBFVDM 1.25-187A8	Red	0,5 ~ 1,5	0,8 * 4,8	22 ~ 16	100
RBFVDM 1.25-250	Red	0,5 ~ 1,5	0,8 * 6,4	22 ~ 16	100
RBFVDM 2-110A5	Blue	1,5 ~ 2,5	0,5 * 2,8	16 ~ 14	100
RBFVDM 2-110A8	Blue	1,5 ~ 2,5	0,8 * 2,8	16 ~ 14	100
RBFVDM 2-187A5	Blue	1,5 ~ 2,5	0,5 * 4,8	16 ~ 14	100
RBFVDM 2-187A8	Blue	1,5 ~ 2,5	0,8 * 4,8	16 ~ 14	100
RBFVDM 2-250	Blue	1,5 ~ 2,5	0,8 * 6,4	16 ~ 14	100
RBFVDM 5.5-250	Yellow	4,0 ~ 6,0	0,8 * 6,4	12 ~ 10	100

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.