


STANDARD

Features:

Material	: Polyamide 6.6
Color	: Transparent / black (UV resistant) : Other colors available on request
Temperature range	: -40 °C up to +85 °C
Flammability	: UL 94 V2 (V0 available)
Certification	: UL, Lloyd's, GL 59425-08HH

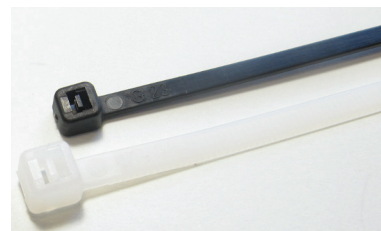

Typenr.	Length (mm)	Width (mm)	Max. bundle diameter (mm)	Tensile strength (kg)	Packing (pcs)	Pcs per carton	
						100 pcs / pack	1.000 pcs / pack
80x2,4mm	80	2,4	15	8,0	100 / 1.000	70.000	90.000
100x2,5mm	100	2,5	22	8,1	100 / 1.000	55.000	70.000
120x2,5mm	120	2,5	30	8,1	100 / 1.000	45.000	65.000
140x2,5mm	140	2,5	33	8,1	100 / 1.000	45.000	55.000
160x2,5mm	160	2,5	40	8,1	100 / 1.000	40.000	45.000
200x2,5mm	200	2,5	53	8,1	100 / 1.000	30.000	32.000
140x3,6mm	140	3,6	33	18,2	100 / 1.000	30.000	30.000
150x3,6mm	150	3,6	35	18,2	100 / 1.000	30.000	30.000
200x3,6mm	200	3,6	53	18,2	100 / 1.000	20.000	22.000
300x3,6mm	300	3,6	76	18,2	100 / 1.000	17.000	17.000
370x3,6mm	370	3,6	102	18,2	100 / 1.000	12.000	12.000
120x4,8mm	120	4,8	24	22,2	100 / 1.000	20.000	25.000
160x4,8mm	160	4,8	38	22,2	100 / 1.000	16.000	18.000
190x4,8mm	190	4,8	46	22,2	100 / 1.000	16.000	16.000
200x4,8mm	200	4,8	50	22,2	100 / 1.000	16.000	16.000
250x4,8mm	250	4,8	60	22,2	100 / 1.000	12.000	12.000
280x4,8mm	280	4,8	70	22,2	100 / 1.000	11.000	11.000
300x4,8mm	300	4,8	76	22,2	100 / 1.000	11.000	11.000
370x4,8mm	370	4,8	102	22,2	100	9.000	-
390x4,8mm	390	4,8	105	22,2	100	8.500	-
430x4,8mm	430	4,8	110	22,2	100	7.500	-
530x4,8mm	530	4,8	140	22,2	100	5.600	-

For other types, please see the following page

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.



CABLE TIES / STANDARD

ATIE

STANDARD

Material	: Polyamide 6.6
Color	: Transparent / black (UV resistant)
	: Other colors available on request
Temperature range	: -40 °C up to +85 °C
Flammability	: UL 94 V2 (V0 available)
Certification	: UL, Lloyd's, GL 59425-08HH



Typenr.	Length (mm)	Width (mm)	Max. bundle diameter (mm)	Tensile strength (kg)	Packing (pcs)	Pcs per carton	
						100 pcs / pack	1.000 pcs / pack
150x7,6mm	150	7,6	33	54,4	100	8.000	-
200x7,6mm	200	7,6	50	54,4	100	7.000	-
250x7,6mm	250	7,6	65	54,4	100	6.000	-
300x7,6mm	300	7,6	76	54,4	100	5.000	-
370x7,6mm	370	7,6	102	54,4	100	4.000	-
450x7,6mm	450	7,6	132	54,4	100	2.500	-
530x7,6mm	530	7,6	140	54,4	100	2.000	-
615x7,6mm	615	7,6	176	54,4	100	2.000	-
750x7,6mm	750	7,6	218	54,4	100	2.000	-
430x9,0mm	430	9,0	110	79,4	100	2.500	-
530x9,0mm	530	9,0	140	79,4	100	2.000	-
610x9,0mm	610	9,0	187	79,4	100	2.000	-
710x9,0mm	710	9,0	190	79,4	100	2.000	-
780x9,0mm	780	9,0	228	79,4	100	2.000	-
830x9,0mm	830	9,0	239	79,4	100	1.500	-
920x9,0mm	920	9,0	263	79,4	100	1.200	-
1020x9,0mm	1020	9,0	295	79,4	100	1.000	-
1220x9,0mm	1220	9,0	365	79,4	100	1.000	-
1530x9,0mm	1530	9,0	460	79,4	100	500	-
230x13,0mm	230	13,0	50	114,0	100	3.000	-
480x13,0mm	480	13,0	120	114,0	100	1.500	-
580x13,0mm	580	13,0	152	114,0	100	1.200	-
730x13,0mm	730	13,0	204	114,0	100	1.000	-
880x13,0mm	880	13,0	248	114,0	100	600	-
1030x13,0mm	1030	13,0	295	114,0	100	600	-

We certify that the values provided are as accurate as possible. Use of these values, however, remains the sole responsibility of the customer and cannot in any way substitute for testing the product under real conditions of use. The user must assess whether this product is suitable for a particular use. KACAB shall not be held responsible for any loss or anomaly resulting from the correct or incorrect use of this product.